

 SUPAIR



WALIBI LITE.

User's manual

English version

SUPAIR-VLD
PARC ALTAÏS
34 RUE ADRASTÉE
74650 ANNECY CHAVANOD
FRANCE

45°54.024'N / 06°04.725' E

RCS 387956790

Revision Indice



Thank you for your choice of a WALIBI LITE. We are proud to join you on your journey in our common passion : paragliding.

SUP'AIR has been designing, producing and selling accessories for free flying activities since 1984. By choosing a SUP'AIR product you benefit from almost thirty years of expertise, innovation and listening. This is also our philosophy : working endlessl


We trust that you will find this user's manual comprehensive, explicit and hopefully pleasant to read. We advise you to read it carefully !

On our website www.supair.com, you will find the last up to date information about this product. If you have any further questions, feel free to ask one of our retailers. And of course, the entire SUP'AIR team are at your disposal through info@supair.com

We wish you many safe flying and enjoyable hours, and happy landings
The SUP'AIR team

Introduction	4	Wash and care of your harness	18
Technical specifications	5	Storage and transport	18
Harness overview	6	Lifetime	18
Components	6	Care	18
Carabiners	7	Repair	19
Optimal airbag	7	Materials	19
Rescue parachute setup assembly.	8	Recycling	19
Adjustable reserve parachute pocket.	9	Environmental friendly practices	19
Reserve parachute installation in the pocket.	9	Warranty	20
Installing the reserve parachute in its pocket.	10	Disclaimer	20
Position setting	12	Pilot's gear	20
Leaning angle setting	13	CE	20
Shoulders' straps adjustments.	13	Service Book	21
Chest strap adjustment.	13		
Flight behavior	14		
Pre-Flight control	15		
Take-off	16		
In flight	17		
Landing	17		

Pictures credits : SUP'AIR

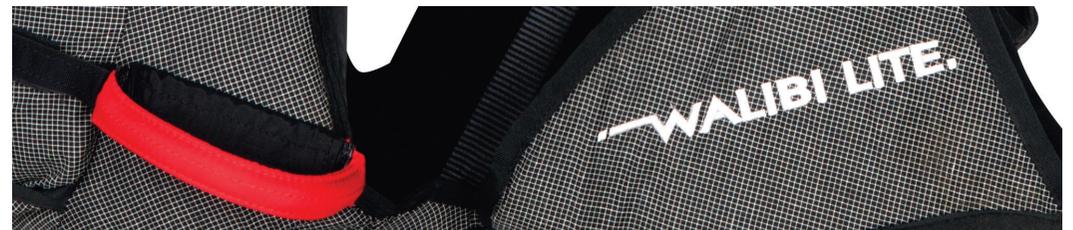

Welcome to the light gear world

With the WALIBI LITE, you are equipped with a light weight tandem harness and particularly light reserve parachute pocket. The split-leg locking mechanism is done via rectangular push-through buckles unaffected by snow. This harness is well suited to fly light at any local sites all year around and let you take an enjoyable hike before taking off once in a while?...

After reading this manual, we suggest you check your harness by hanging in it before flying.

N.B : Three important icons will help you when reading this manual



Advice



Caution !




Danger !!



Technical sheet

- A** Back height (cm)
- B** Leaning setting height (cm)
- C** Seat length (cm)
- D** Seat width (cm)
- E** Carabiners height (cm)
- F** Carabiners distance (cm)

	Size S 155-175 cm	Size M/L 170-195 cm
Pilot size	155-175 cm	170-195 cm
Harness weight (+ carabiners+speedbar)	1750 g	1770 g
Designed for	Paragliding only	Paragliding only
Back height (cm)	58	68
Leaning setting height (cm)	28	34
Seat length (cm)	40	47
Seat width (cm)	40	47
Carabiners distance (cm)	39-53	39-53
Impact damping system : Airbag (Volume)	Option	Option
Impact damping system : Bumpair (Thickness)	No	No
Homologation	EN 1651	EN 1651
Flight : tandem (Pilot- Passenger)	Pilot	Pilot
Flight : acrobatic flying	No	No
Take-off : Winching	No	No
Quick-out carabiners compatibility	No	No
	Split-leg design.	Split-leg design.

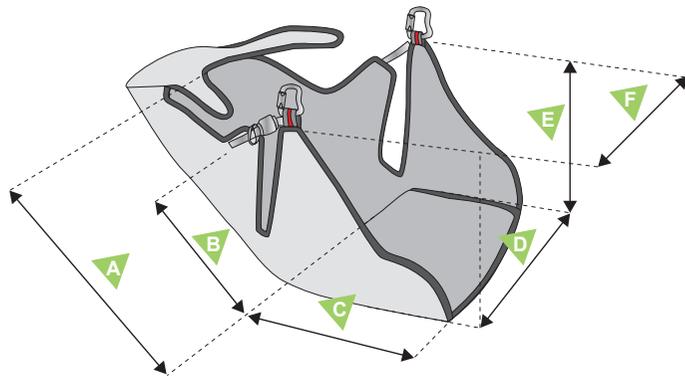

This harness is delivered with two 30 mm Biners (138 g. for the set).

- 1 Harness
- 2 Reserve parachute handle (W Lite)
- 3 30 mm Aluminium self-locking biner




Harness overview

This illustration will help you during your reading.



- 1 Automatic ventral buckle
- 2 Rectangular push-through leg straps buckles.
- 3 Ventral width adjustment
- 4 Leaning setting
- 5 Shoulders straps adjustment
- 6 Reserve parachute handle (AX2-R)

1. Carabiners

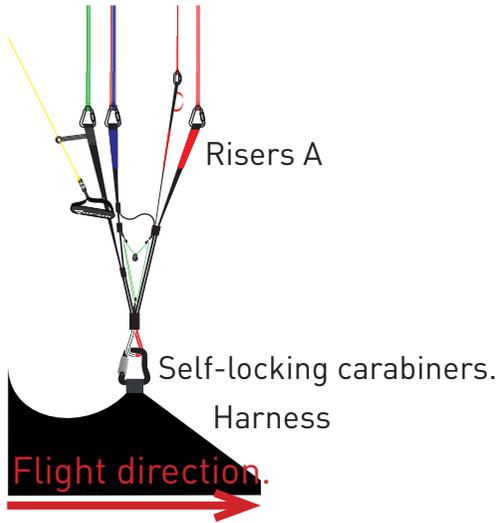

Without twisting the risers, connect them to the harness attachment loops using the self-locking carabiners.

Check for the risers to be properly positioned and untwisted. The «A» risers must be located at the front and facing the flight direction (see diagram).

Lastly, check for the main self-locking carabiners to be fully closed and locked in place.

1. Open the zip on the lateral parts



2. Dress the lateral part on the leg side of the harness.



3. Close the zip on the lateral parts



4. Pass the back elastic around the rescue pocket flap



5. Close the rescue pocket



6. End.





2. Airbag WALIBI LITE



Thank you for comprehensively reading the following ! We will recommend you to have your reserve parachute initially installed by someone competent and familiar with the procedure.

Connecting the handle to the rescue parachute's deployment bag

Place the handle inside the middle webbing loop and make a lark's head knot with the handle.

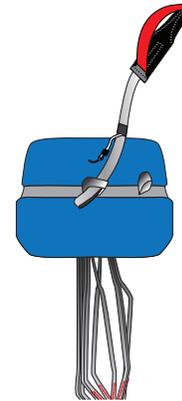

Fasten tightly the lark's head knot and verify the solidity of the link.

The handle must be connected to the central loop.



Thank you for comprehensively reading the following ! We will recommend you to have your reserve parachute initially installed by someone competent and familiar with the procedure.

Adjustable reserve parachute pocket.

The reserve parachute pocket volume is variable in size. You first must adjust its volume according to that of your reserve parachute.

The pocket volume can slightly be increased by using the lateral flaps external grommets.

The harnesses are delivered by default, with the "small" volume setting corresponding to the X-TRALITE BI-SUPAIR reserve parachute size.

Small volume default setting.



Pull on the rear flap, remove the cord from it grommet.



Push the piece of line/cord, underneath the connection strap, then through the external grommet.




Reserve parachute installation in the pocket.



Insert the reserve parachute inside the harness parachute pocket by opening all the flaps. The POD must be positioned with the handle at the top with risers and lines at the bottom. Push the risers through the guiding sleeves (the risers must be located behind the parachute).



Push the cord through the right loop (if the handle is located to the right).

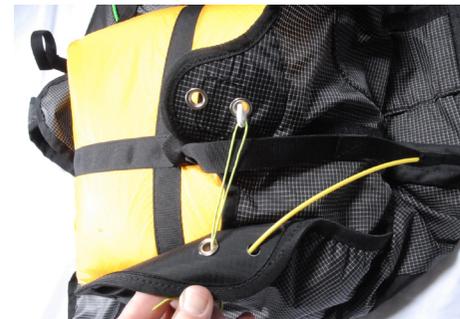

Push the loop through the lower flap grommet. The yellow cable will also be pushed through the lower flap guide located near the grommet.



Push the cord through the upper flap grommet.




Push the yellow cable through the loop and gently pull the cord out.



Push the cord through the left loop.



Push the loop through the lower flap grommet.

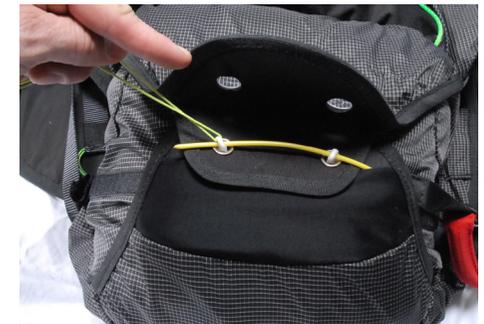

Push the loop through the upper grommet flap grommet and push the yellow cable through it (loop).



The yellow cable locks the reserve parachute pocket flaps in place. Tuck the upper flap inside its lower stretchable pocket. Check before every flight for the yellow cable to be properly inserted through the two loops keeping the reserve parachute pocket securely



Position the handle in its folding sleeve. It may not protrude from the harness.




Handle positioning in its holding sleeve.

Upon setup completion, conduct an extraction sequence during a hang-test to verify that all works properly before duplicating the installation procedure again...

Install the risers inside the lateral guiding sleeve. The risers come out of each strap guide.

Connect the risers atop each spreader-bar (main hooking location), with the maillon rapide square stainless steel 7 mm + the flexible elastic rings.

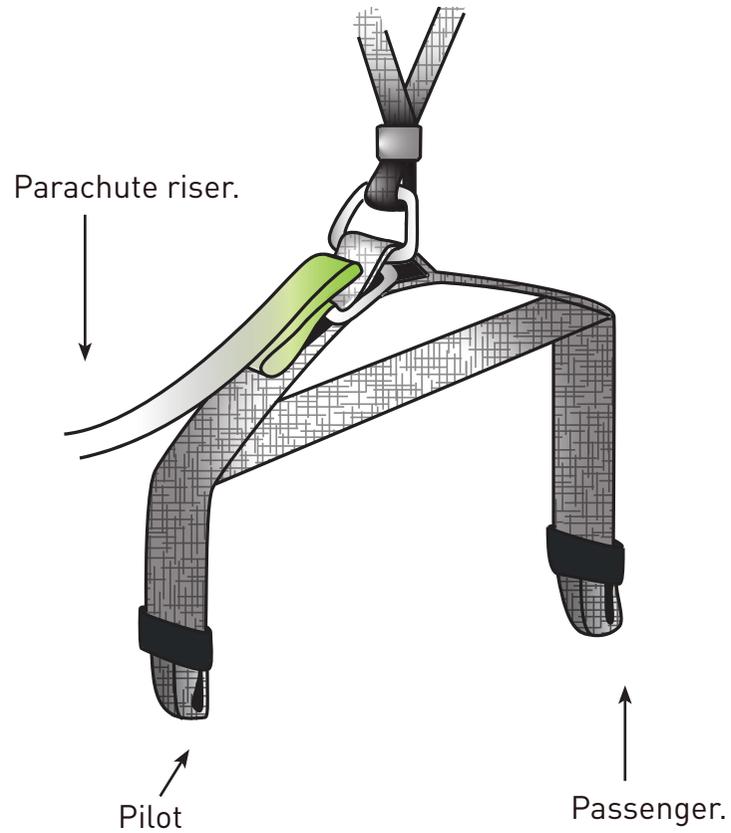




All harness adjustments must be made prior the first flight during a hang-test session. It is of utmost importance to adopt a proper flying posture, check all basic adjustments and have easy access to in-flight adjustments.

- 1 Chest strap finger-loop tension tightening adjustment.
- 2 Chest strap finger-loop tension release adjustment.
- 3 Tightening snapper (leaning setting)
- 4 Loosening strap (leaning setting)
- 5 Tightening snapper (shoulder strap)
- 6 Loosening strap (shoulder strap)



A Leaning angle setting

Set the angle of leaning by tightening the snapper (towards a more vertical position) or the black webbing (towards a more horizontal position).

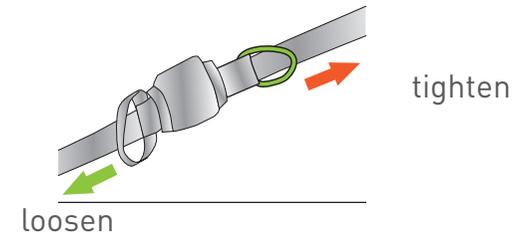


B Shoulders' straps adjustments.

Tighten the shoulder straps by pulling the finger loop down.

Pull up to release.

The shoulder straps support, greatly helps the comfort level. It should be set precisely. You must find the correct tension between the side and shoulder straps adjustments.

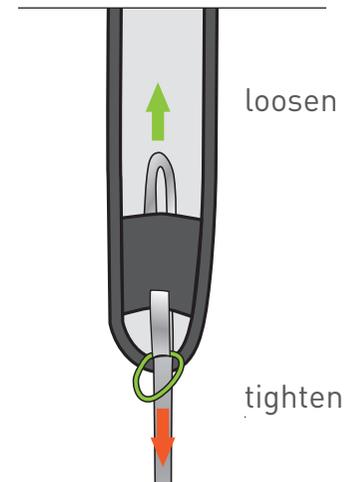

C Chest strap adjustment.

To adjust correctly during a hang-test. The chest-strap tensioning/loosening has little effect on the wing's incidence while weight-shifting.

The WALIBI LITE is a tandem harness. Its split-leg system enables the pilot to quickly adopt a comfortable seating posture with the passenger between the legs immediately after takeoff. The split-leg system facilitates the running phase as well.

The following harness can also be used in solo flights. It is equipped with a split-leg self-stabilizing system buffering the overall flight handling.



Conduct a thorough pre-flight check before each takeoff.



- Check that the harness, the carabiners, the spreader bar and in general all your flight equipment are not damaged. As the captain, you are responsible for the safety of the crew
- Be certain for the reserve parachute pocket to be properly closed with its handle securely in place.
- Check that your harness adjustments have not changed.
- Check the connexion risers / harness as well as the self-locking Biners (locked and secured).

Only after a thorough weather conditions analysis, can the decision to wether fly or not be taken, and outfit yourself with the harness.



- Fasten and securely lock the leg and chest-strap buckles.
- Double check that all buckles are fully locked and secured by pulling firmly on them. Check that no line, tab or cloth is stuck / jammed in the buckles.
- Be absolutely certain for the reserve parachute handle to work freely without anything impeding its proper functioning.



- **WARNING!** This light harness is not equipped with a safe-T strap system. You must be extremely aware of your situation at all time and take all precautionary necessary safety measures during each inflation and takeoff, as well as be totally sure for all t



Takeoff is a simple and straight forward. The transition from running to seating is easy.



Do not push yourself inside the seat with the toggles still connected to your hands. There would be a risk of increasing the angle of attack, slowing the wing down with a possible stall taking place as a result.



In flight



Please set the distance between the two carabiners according to the aerology and to the wing manufacturer's recommendations. The average distance / spacing for most gliders from the center of the right Biner to the center of the left Biner where the riser



Tightening the chest strap provides more stability but less harness piloting efficiency. Doing so, increases the risk of riser twisting. On the contrary, loosening the strap provides more efficiency but can be dangerous in turbulent aerology while increas

Landing

Stretch your legs the and adopt an upright position in order to run and dissipate horizontal speed.

With a split-leg harness, adopting a standing/upright posture may feel more difficult to achieve than with a seat-plate outfitted harness. Straightening/ stretching the legs fully will help reaching a standing posture.



Do not land whilst in the seated position, this is dangerous.

Wash and care of your harness

It is a good idea to wash your harness from time to time. To do this, we recommend to use a soft solvent (such as soap), use a brush and rinse thoroughly. In any case, do not use chemicals such as detergents or strong solvent because it may deteriorate the webbing, stitching and fabrics of your harness.

The zip fasteners should be lubricated from time to time, using a silicon spray.

If your harness gets wet, it is advisable to treat your automatic buckles and carabiners with silicone grease from time to time.

Storage and transport

When you don't use your harness, store it inside your paragliding rucksack, in a dry, cool and clean place, protected from UVs exposure. If your harness is wet, please dry it thoroughly before storing.

For transport, protect the harness from any mechanical or UV deterioration (use a bag). Please avoid long transports in wet conditions.

Lifetime

Independently of the pre-flight check-out, you have to open and unfold your rescue parachute once every 6 months. Once every 2 years, you need to perform a complete check of your harness :

- Carbon seat plate : no crack, no asperity.
- webbings (no excessive wear, no rip beginning, no unwanted folds)
- buckles and carabiners (no structural cracks / works fine).



The threads composing the webbing and fabrics used in the WALIBI LITE have been selected in order to ensure the best possible lightness/lifetime compromise. Nonetheless, in some conditions, after a long term exposure to UV and/or significant abrasion or exposure to chemicals, it is compulsory to check your harness in a certified repair centre. It is about your safety.



These carabiners must never be used for anything else else than paragliding (not for climbing, no towing, etc.).

Supair advice to replace the carabiners and spreader bars every 5 years or after 500 hours of use.

Repair



Though we use the highest quality materials, it is possible that your harness may eventually deteriorate through general use. If it is showing any signs of significant wear and tear, you should check it and repair it in an certified repair centre. SUP'AIR offer a repair facility for their products beyond the end of the warranty period. Please contact us either by telephone or by E-mail sav@supair.com in order to receive a quotation.

Materials

Fabrics

DYNEEMA® RIPSTOP
CORDURA®

Webbings

Polyamide 20 mm (500DaN)
Polyester 25 mm (1250 DaN)

Recycling

All our materials are selected for their technical and environmental characteristics. No components of our harnesses may harm nature. Most of our components are recyclable.

If you judge your harness has finished its life, you can separate all the plastic and metallic parts and apply up-to-date sorting rules in effect in your community. For recycling of the fabric parts, we advise you to contact your local authority that deal

Environmental friendly practices

We highly recommend you to respect as much as possible our environment while practicing paragliding and especially : not to go outside tracks, do not make unwanted noise and do not disturb the mountain areas' balance. We advise you to do this starting from the take-off.

Warranty SUP'AIR takes the greatest care in the design and production of its products. SUP'AIR guarantees its products 5 years (from purchase date) against any defect or design fault occurring during normal use. Any damage or degradation resulting from incorrect or abusive use, abnormal exposure to aggressive factors, including, but not limited to; high temperature, intense sun exposure, high humidity etc will invalidate this warranty

Disclaimer

 Paragliding is an activity that requires, skill, specific knowledge and sound judgement. Be careful, learn in certified schools, subscribe an adequate insurance policy as well as a flying license and make sure your skill match the conditions. SUP'AIR cannot be held responsible for your paragliding decisions or activities.

 This SUP'AIR product has been designed exclusively for paragliding. Any other activity such as skydiving or BASE jumping is absolutely forbidden.

Pilot's gear

 This is essential that you carry a helmet, suitable boots and clothing. Taking a reserve parachute suitable for your weight and correctly connected to your harness is also very important.

CE certification : About the paragliding harnesses protection

 We want to inform you and let you know that no harness protection can guarantee a complete protection against injury. In particular, the back protector which does not prevent potential injuries to the spine or pelvis. Moreover, only parts of the body covered by the air bag may benefit from protection against potential impacts.

Warning, any modification or misuse of the protection can dangerously alter its performance and compromise the integrity of the safety device.

Protection is ensured only when the protective elements are present and properly installed. Thus, when the protection is removable, check that it is correctly positioned.

Your harness protection CE conformity labeling is certified by the following laboratory :
CRITT Sport Loisirs nr. 0501, Z.A. du Sanital, 21 Rue Albert Einstein, 86100 Chatelleraut – FRANCE

This page will help you to record all the life stages of your WALIBI LITE harness.

Serial	number	:
--------	--------	---

Purchase date	
Owner's name	
Name and stamp of the shop	

<input type="checkbox"/> Care	
<input type="checkbox"/> Resale	
date	
Workshop's name/ Buyer's name	

<input type="checkbox"/> Care	
<input type="checkbox"/> Resale	
date	
Workshop's name/ Buyer's name	

<input type="checkbox"/> Care	
<input type="checkbox"/> Resale	
date	
Workshop's name/ Buyer's name	

<input type="checkbox"/> Care	
<input type="checkbox"/> Resale	
date	
Workshop's name/ Buyer's name	

S SUPAIR



WALIBI LITE.

SUPAIR-VLD
PARC ALTAÏS
34 RUE ADRASTÉE
74650 ANNECY CHAVANOD
FRANCE

45°54.024'N / 06°04.725' E

RCS 387956790